


Reference Layout for nPM1300-CAAA

Config 4: Full config. + high frequency decoupling

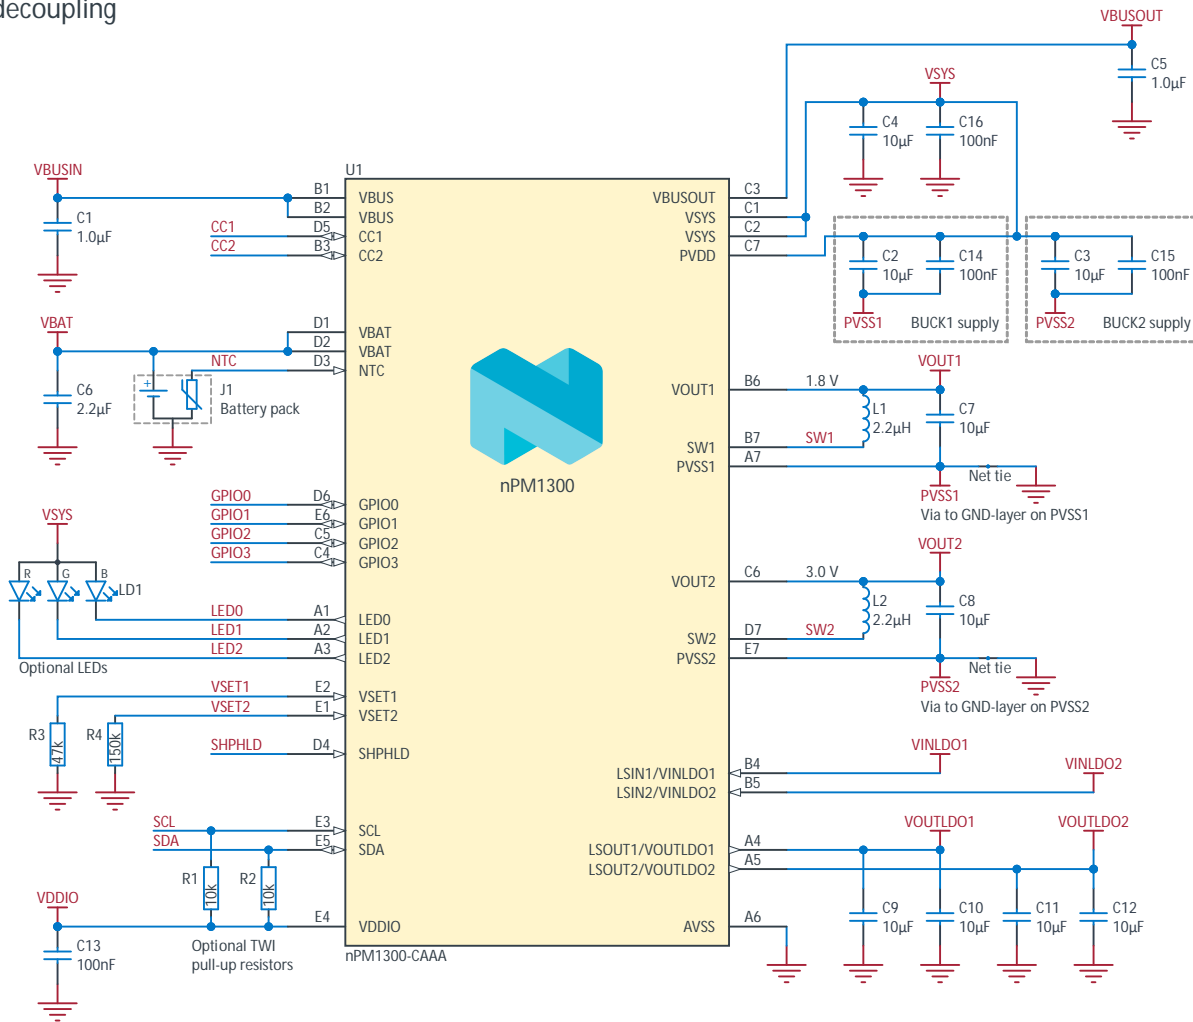

Designer note:
C14, C15 and C16 are additional high frequency capacitors for improved decoupling in designs meeting stricter EMC requirements.

Nordic Semiconductor does not warrant the accuracy or completeness of this documentation or any included information. Nordic Semiconductor makes no assurances that this design will meet specification, be appropriate for your application, or fit for any particular purpose, or that it will function in an implementation. Nordic Semiconductor also does not claim that the design is ready for production. It is your responsibility to thoroughly validate and test your design implementation to confirm the functionality of your application.
© Nordic Semiconductor — All rights reserved.

Title Full config. + high frequency decoupling			
Size A4	Config. No. 4	Device nPM1300-CAAA	Revision 1.1
Date: 2025-06-05			Sheet 1 of 1
File: npm1300_caaa_config4.SchDoc			Drawn By: EISK
Classification: PUBLIC			